

P ZERO™ ROAD

ALL-ROUND PERFORMANCE

DESIGNED FOR:

HANDLING

COMFORT

PROTECTION

TECH HIGHLIGHTS:

EVO COMPOUND

TECHBELT
ROAD




DESCRIPTION:

Pirelli widens the P ZERO™ family by introducing the most comprehensive and all-round tyre in its portfolio. The new P ZERO™ ROAD aims to be the perfect solution for those riders who are looking for the most balanced performance.

It has been specifically developed as a training tyre for the fastest racers at the World Tour level. Pirelli designed this new **tubetype** tyre with Evo compound and TechBELT casing technology to give great puncture protection, reliability and comfort at light weight.

CHARACTERISTICS:

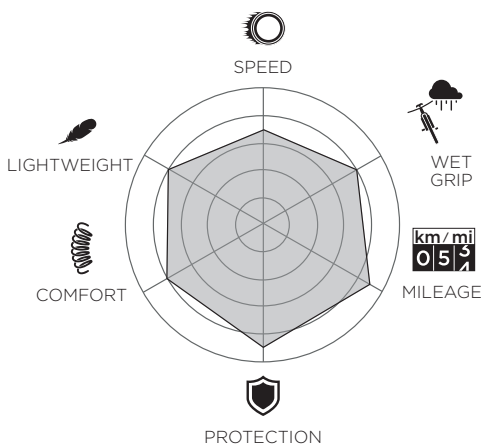

APPLICATIONS



SEASONALITY (☀ & ☁)



- NOT INTENDED USE
- POSSIBLE USE
- INTENDED USE

TECH OVERVIEW:

1 Compound



High-tech formulation that provides excellent grip and low rolling resistance at the same time, while offering a great balance of mileage and all-round performances

PERMITS YOU TO RIDE FAST AND FURTHER

2 Structure



High performing casing structure with an added layer of high cut resistant fabric underneath the tread to provide superior puncture protection in a wide variety of conditions

GOOD PUNCTURE PROTECTION AND COMFORT AT LIGHT WEIGHT


3 Mounting & Sizing



P ZERO™ Road 24-622		
Size development @ 7bar/102psi		
ETRTO Rim	WIDTH (WAM)	OUTER RADIUS (RAM)
15c	23 mm	338 mm
17c	24 mm	338 mm
19c	25 mm	338 mm
21c	26 mm	338 mm

P ZERO™ Road 26-622		
Size development @ 7bar/102psi		
ETRTO Rim	WIDTH (WAM)	OUTER RADIUS (RAM)
15c	25 mm	341 mm
17c	26 mm	341 mm
19c	27 mm	341 mm
21c	28 mm	341 mm

P ZERO™ Road 28-622		
Size development @ 6,5bar/94psi		
ETRTO Rim	WIDTH (WAM)	OUTER RADIUS (RAM)
15c	27 mm	344 mm
17c	28 mm	344 mm
19c	29 mm	344 mm
21c	30 mm	344 mm



Rim compatibility developed under ETRTO standards: carefully check your rim width before use.



The EVOCompound includes all those technical characteristics needed for an all-round performance: excellent rolling resistance and grip, good adhesion and long durability. As a result of the combination of these properties, the EVOCompound has been optimized so to have the most balanced features for the rider.

Developed together with our World tour Teams
BikeExchange | TREK Segafredo | AG2R Citroën



FINE TUNE YOUR PERFORMANCE

RECOMMENDED PRESSURE CHART



700x24c on 17C RIM

RIDER WEIGHT	RECOMMENDED PRESSURE	
≤ 50 kg / ≤ 110 lb	6 bar	87 psi
51 - 57 kg / 112-126 lb	6,2 bar	90 psi
58 - 65 kg / 128-143 lb	6,5 bar	94 psi
66 - 73 kg / 145-161 lb	6,8 bar	99 psi
74 - 81 kg / 163-179 lb	7,2 bar	104 psi
82 - 88 kg / 181-194 lb	7,9 bar	109 psi
89 - 95 kg / 196-209 lb	8 bar	114 psi
≥ 96 kg / ≥ 212 lb	8,2 bar	119 psi
on RIM 19C : -0,3 bar (4,5 psi) - on RIM 15C : +0,3 bar (4,5 psi)		




700x26c on 19C RIM


RIDER WEIGHT	RECOMMENDED PRESSURE	
≤ 50 kg / ≤ 110 lb	5,5 bar	80 psi
51 - 57 kg / 112-126 lb	5,8 bar	84 psi
58 - 65 kg / 128-143 lb	6,1 bar	88 psi
66 - 73 kg / 145-161 lb	6,4 bar	93 psi
74 - 81 kg / 163-179 lb	6,8 bar	98 psi
82 - 88 kg / 181-194 lb	7,1 bar	103 psi
89 - 95 kg / 196-209 lb	7,4 bar	108 psi
≥ 96 kg / ≥ 212 lb	7,7 bar	112 psi
on RIM 21C : -0,3 bar (4,5 psi) - on RIM 17C : +0,3 bar (4,5 psi)		

700x28c on 19C RIM

RIDER WEIGHT	RECOMMENDED PRESSURE	
≤ 50 kg / ≤ 110 lb	5,0 bar	72 psi
51 - 57 kg / 112-126 lb	5,2 bar	76 psi
58 - 65 kg / 128-143 lb	5,5 bar	80 psi
66 - 73 kg / 145-161 lb	5,9 bar	85 psi
74 - 81 kg / 163-179 lb	6,2 bar	90 psi
82 - 88 kg / 181-194 lb	6,6 bar	95 psi
89 - 95 kg / 196-209 lb	6,9 bar	100 psi
≥ 96 kg / ≥ 212 lb	7,2 bar	105 psi
on RIM 21C : -0,3 bar (4,5 psi) - on RIM 17C : +0,3 bar (4,5 psi)		

DEPENDING ON RIDING STYLE

-  **COMFORT**> drop 0,3 bar / 5 psi on FRONT wheel
-  **AGGRESSIVE**> keep same pressure front/rear
-  **WET AND/OR COLD** road conditions (BELOW 7°C/44F) drop 0,3 bar / 5 psi on BOTH wheels

 Never exceed the maximum inflation pressures of either the rim and the tyre.

DESCRIPTION	RIM	CASING	TECHNOLOGY	WEIGHT	COMPOUND	SRP €	\$ SRP
P ZERO™ Road 700x24c	17C	120tpi	TechBELT	215g	EVO	39,90 €	\$ 49,90
P ZERO™ Road 700x26C	17C	120tpi	TechBELT	235g	EVO	39,90 €	\$ 49,90
P ZERO™ Road 700x28C	17C	120tpi	TechBELT	255g	EVO	39,90 €	\$ 49,90